

2-WAY POWER DIVIDER

SYNSTRIPTM MODEL M2D2428

ULTRA LOW LOSS

2400 - 2800 MHz


FEATURES:

- Synstrip Technology™
- Small Size, Surface Mount
- Optimum Performance

SPECIFICATIONS:

Operating Frequency:	2400 - 2800 MHz	Amplitude Unbalance:	0.5 dB (Max)
Insertion Loss:	0.5 dB (Typ) / 1.0 dB (Max)	VSWR:	1.3:1 (Typ)
Isolation:	20 dB (Typ) / 15 dB (Min)	Impedance:	50 ohms
Phase Unbalance :	5.0° (Max)	Input Power:	1 Watt (Max)
		Operating Temp. Range:	-30° to +70° C

MECHANICAL OUTLINE:231

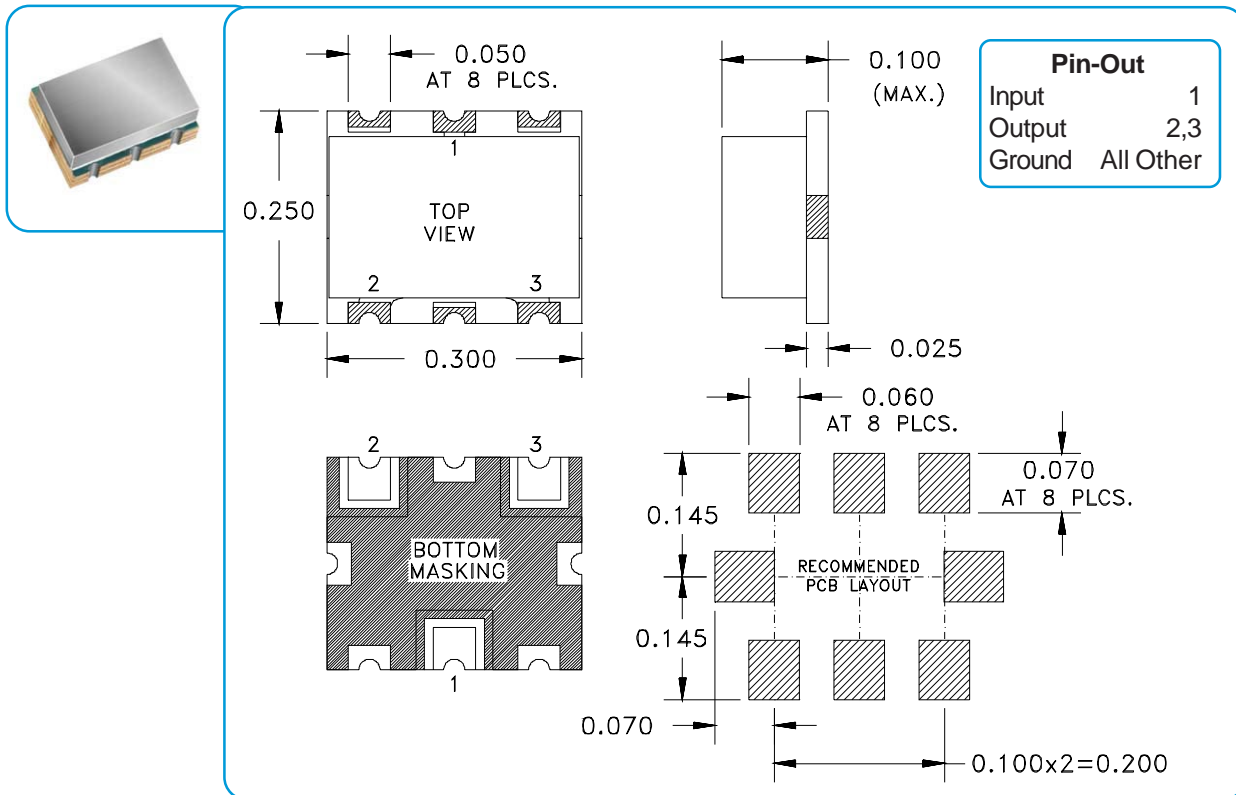

2-WAY POWER DIVIDER

SYNSTRIPTM MODEL M2D2428

ULTRA LOW LOSS

2400 - 2800 MHz

PERFORMANCE PLOTS

